




GE
Lighting

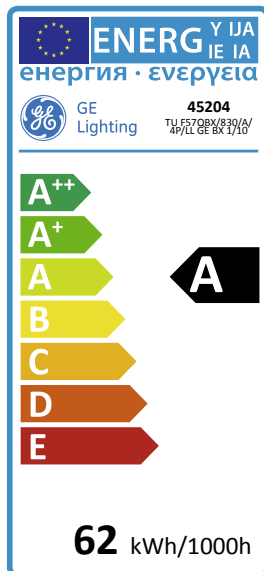

62
kWh/1000h

A
energy class

75
lumens/watt

Biax™ Q/E LongLast™ 4-pin TU F57QBX/830/A/4P/LL GE BX 1/10 45204

Product information

The Biax™ Q/E, is a high output compact fluorescent lamp designed to fulfill customers' demand for higher lumen packages. The ultra compact energy saving Biax™ Q/E lamps with amalgam technology extend the application space of the innovative quadruple tube design. They can be used both in enclosed luminaires and outdoor applications without significant light loss. Amalgam technology makes the Biax™ Q/E lamps suitable for use in any burning position with the same light output. The Biax™ Q/E lamps with a 4-pin electrical connection and without an internal starter are designed for high-frequency electronic ballasts. Quadruple biaxial tubes

Application areas



Office



Industrial



WORLDWIDE PARTNER

Product data

Product Code	45204
Bulb Shape	Oct plug-in
Bulb maximum overall diameter [mm]	58.3
Maximum Overall Length [mm]	180.7
Net weight per piece [g]	164
Gross weight per piece [g]	205
Operating position	U - Universal
Mercury Content [mg]	3
UV radiance	exempt
Brand	General Electric (GE)
Cap/Base	GX24q-5

Performance data

Colour Code	830
Weighted energy consumption [kWh/1000h]	61.6
Energy efficiency class (EEC)	A
Rated Life [h]	20000
Rated median life on electronic (HF / ECG) ballast on IEC 20000 12-hour cycle	
Rated median life on electronic (HF / ECG) ballast on IEC 17000 3-hour cycle	
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	4300
Colour Rendering Index (CRI) [Ra]	82


Electrical data

Operating Temperature (MIN) [°C]	-15
Starting ambient temperature range	-15
Dimming Capability	Yes
Nominal power [W]	57
Nominal lamp voltage [V]	175


Logistic data

DUN Code	10043168452042
EAN Code	0043168452045
Pack Quantity	10
Layer quantity	200 EUR, 260 UK
Layer quantity EUR	200
Layer quantity UK	260
Pallet quantity EUR (PC)	800
Pallet quantity UK (PC)	1040
Outer case size	311 x 131 x 204 (mm)
Product status	Available

Technical drawing

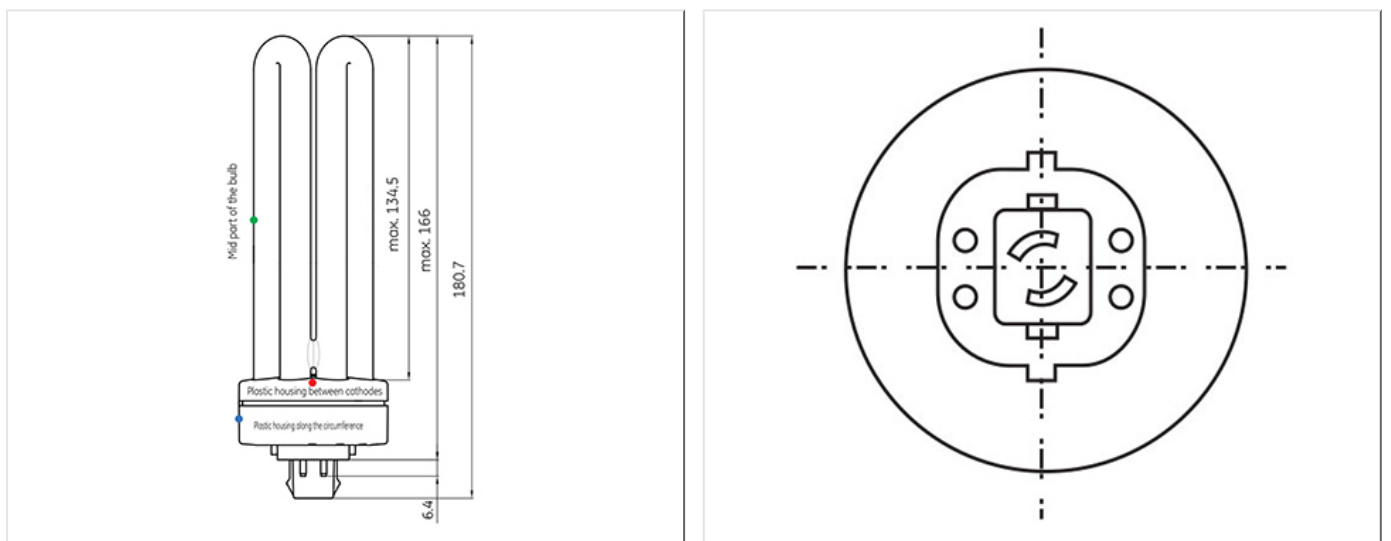

Survival data

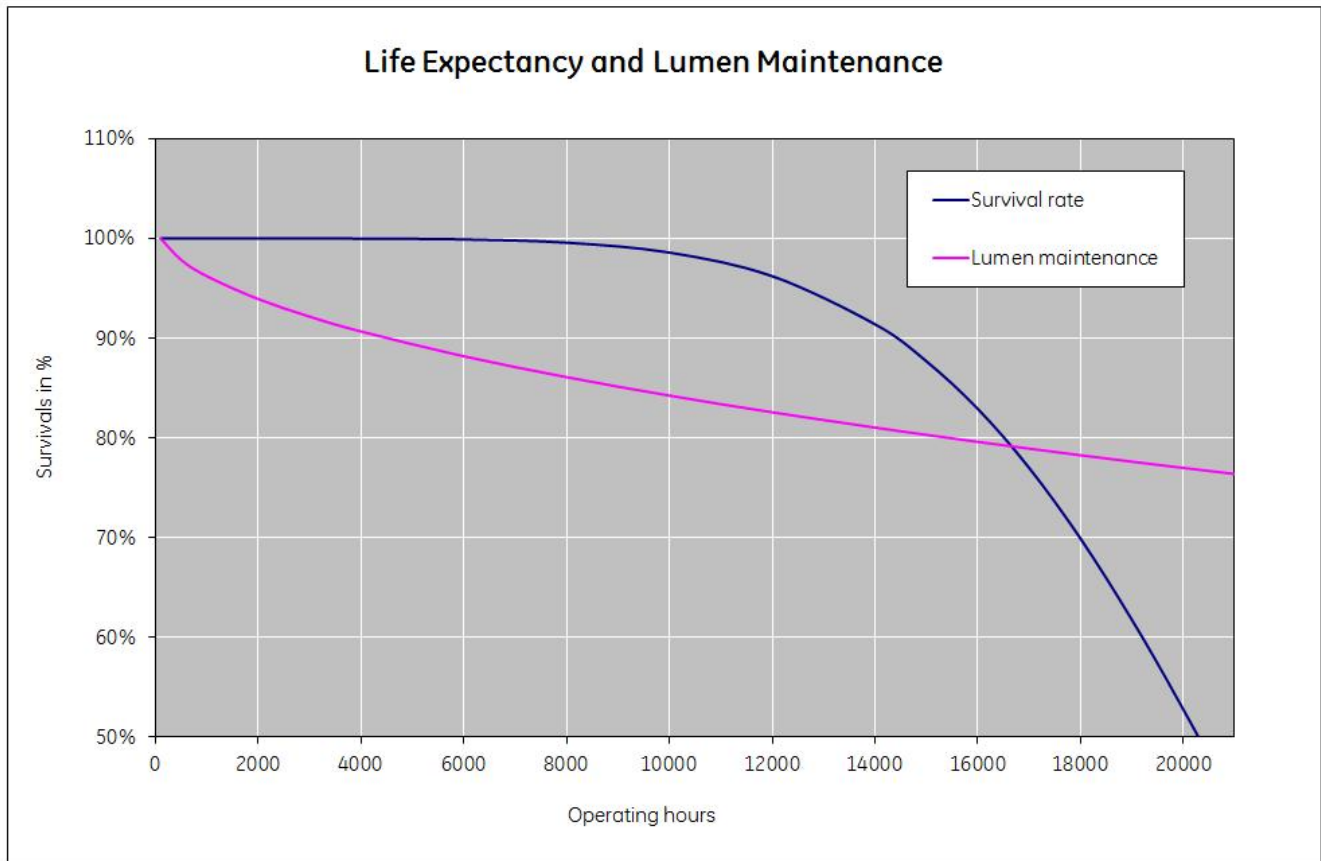

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[CFL Non-Integrated Spectrum Catalogue \(PDF\)](#)

[Biax™ LongLast™ Lamps Brochure \(PDF\)](#)

[Biax™ Q/E Lamps Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Disposing and Cleaning of CFL Lamps \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)